


Rated Capacity for Slings

| Angle Degrees | Factor | Rated Capacity |
|---------------|--------|--|
| 90 | 1.0000 | <p>The rated capacities of the slings in this Web Site are given in pounds. Refer to the maximum recommended weight for which the sling is to be used in one of the standard types of lifts as illustrated.</p> <p>Effect of Angle</p> <p>When slings are used at an angle (i.e. two slings or one sling in a basket attached to only one crane hook), sling capacity is reduced. How much it is reduced depends on the degree of the angle. You can determine whether a sling will be rated high enough if you know the angle between the sling leg and the horizontal. Once you know this angle, multiply the sling's rating by the appropriate factor to the table. This will give you the sling's reduced rating.</p> |
| 85 | 0.9962 | |
| 80 | 0.9848 | |
| 75 | 0.9659 | |
| 70 | 0.9397 | |
| 65 | 0.9063 | |
| 60 | 0.8660 | |
| 55 | 0.8192 | |
| 50 | 0.7660 | |
| 45 | 0.7071 | |
| 40 | 0.6528 | |
| 35 | 0.5736 | |
| 30 | 0.5000 | |
| 25 | 0.4226 | |
| 20 | 0.3420 | |
| 15 | 0.2588 | |

Sling Capacity Decreases as the Angle Increases



A sling capable of lifting 1000 lbs. in a 30 degree vertical basket hitch, can only lift 866 lbs. at a 30 degree angle, 707 lbs. at a 45 degree angle, and 500 lbs. at a 60 degree angle.

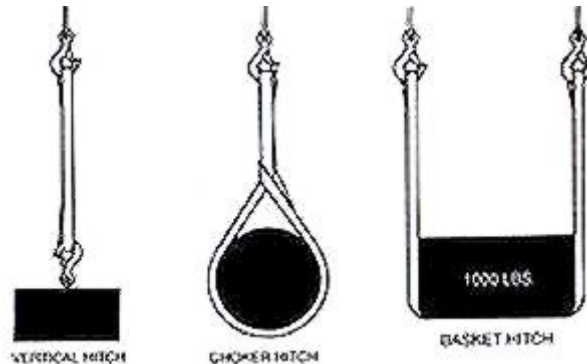

Caution - Do Not Exceed Rated Capacities